



CONCRETE + REBAR = ASPHALT + ARAMID

Everyone knows that rebar added to concrete provides exceptional, reliable reinforcement. This same reliable reinforcement occurs when aramid is added to asphalt. Its high time we come to grips with this need for proven performance enhancement, longer life, low carbon pavements and a way easier way than the comparative example to get this reinforcement into the mix.

- Surface Tech's **ACE XP™** is EPD Certified. 0.668 kg CO₂/US Mix Ton.
- Compliant with Build America, Buy America Act. No waiver required.
- ASTM Standard D8395-2023 for Aramid Fibers in Asphalt Mixtures standardizes a dose as 2.1oz/US Ton (65 grams/tonne).

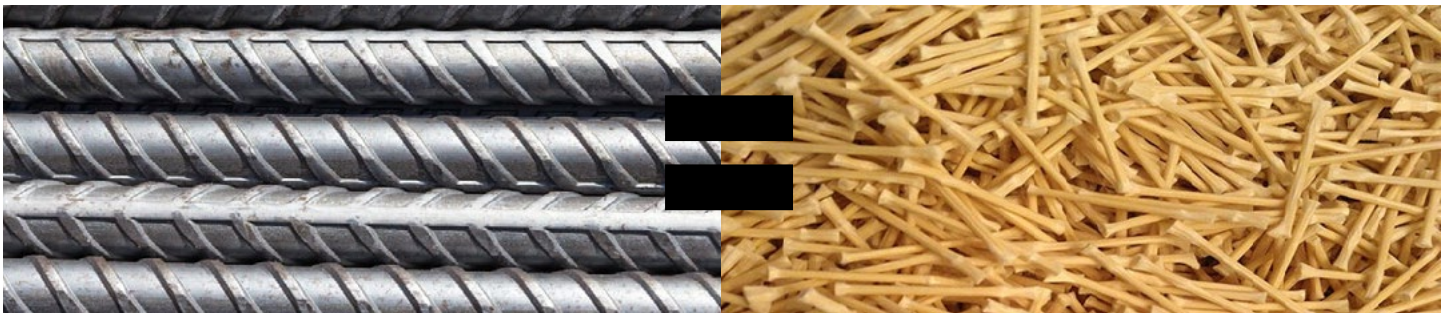

ESAL - Reinforced/Unreinforced Asphalt Thickness Chart

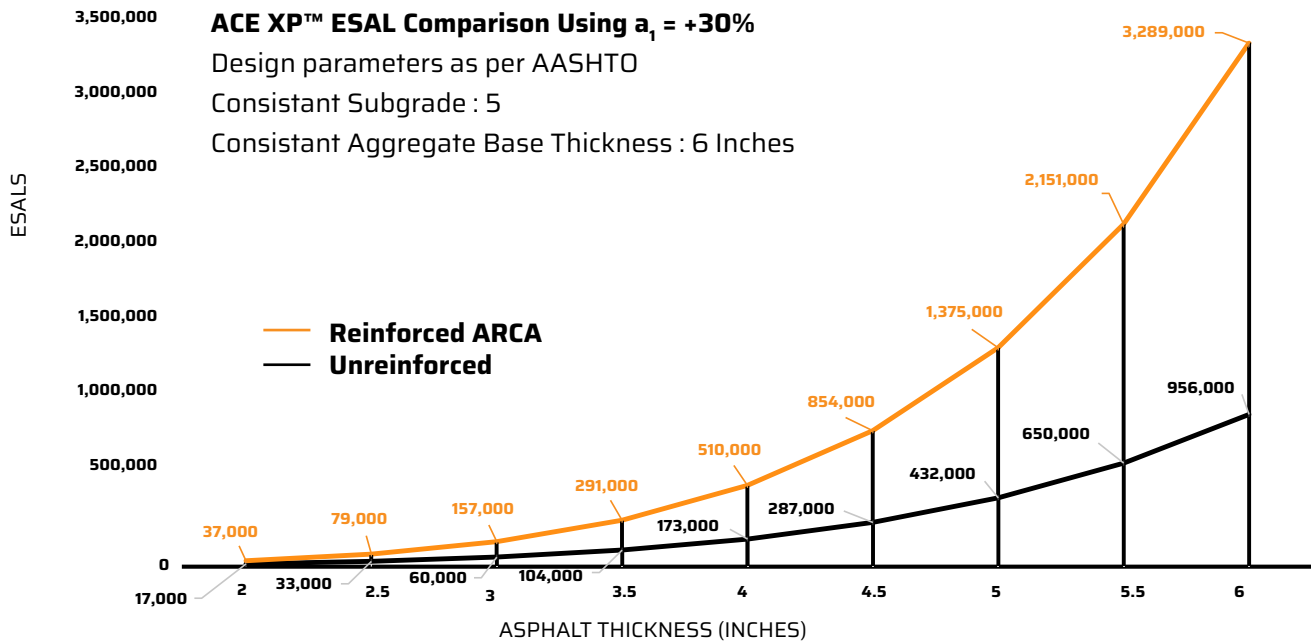

Surface Tech Contact:
 312 S. Cedros Ave., S200, Solana Beach, CA 92075
 +1-619-880-0265
info@surface-tech.com
www.surface-tech.com

